浙江赛飞汽车配件有限公司
ZHEJIANG SAIFEI AUTO PARTS CO.,LTD.

SF110W5A-430



Design Features -------

- Multiple mounting heights and outer pipe specifications of 110mm/120mm are available for selection
- Outboard gearbox, compact structure
- Satisfy the frequent need for hanging and swinging
- Sealed structure, designed with new technology, Ensure longer product lifespan
- The input and output shafts are coated with electrophoretic paint, which is corrosion-resistant
- Legs support mounting and reverse mounting.

设计特点-------

- 多种安装高度规格可供选择
- 外置齿轮，结构紧凑
- 满足频繁甩挂需求
- 密封结构，采用新技术设计，
- 确保产品使用寿命更长
- 输入输出轴为电泳漆，耐腐蚀
- **支腿可正装或者反装**

Static load（静载荷）	77T/Pair
Lift capacity（提升能力）	25T/Pair
Mounting height（安装高度）	856mm
Travel max（行程）	480mm
High gear（高速挡）	5.64mm/r
Low gear（低速挡）	0.65mm/r

Static load（静载荷）	77T/Pair
Lift capacity（提升能力）	25T/Pair
Mounting height（安装高度）	806mm
Travel max（行程）	430mm
High gear（高速挡）	5.64mm/r
Low gear（低速挡）	0.65mm/r

浙江赛飞汽车配件有限公司

ZHEJIANG SAIFEI AUTO PARTS CO.,LTD.

Durability, achieving robust performance

耐用性，实现稳健性能

Cover:

Fully sealed configuration, preventing moisture and dust from entering

上封盖：

全密封配置，防湿气灰尘进入

Heavy duty thrust bearing :

Meet the impact requirements of GB/T2677-2023

重型止推轴承：


满足国标 GB/T26777-2023 冲击要求

Double thread lead screw and nut:

QT600-3is pearlite heat-resisting steel,has medium and high strength, Medium toughness and plasticity good wear resistance and shock absorption,square structure, coincide with landing gear inside tube, uniformly distributed load.

双螺纹丝母：

QT600-3 为珠光型球墨铸铁,具有中高等强度、中等韧性和塑性，综合性能较高。耐磨性和减震性良好

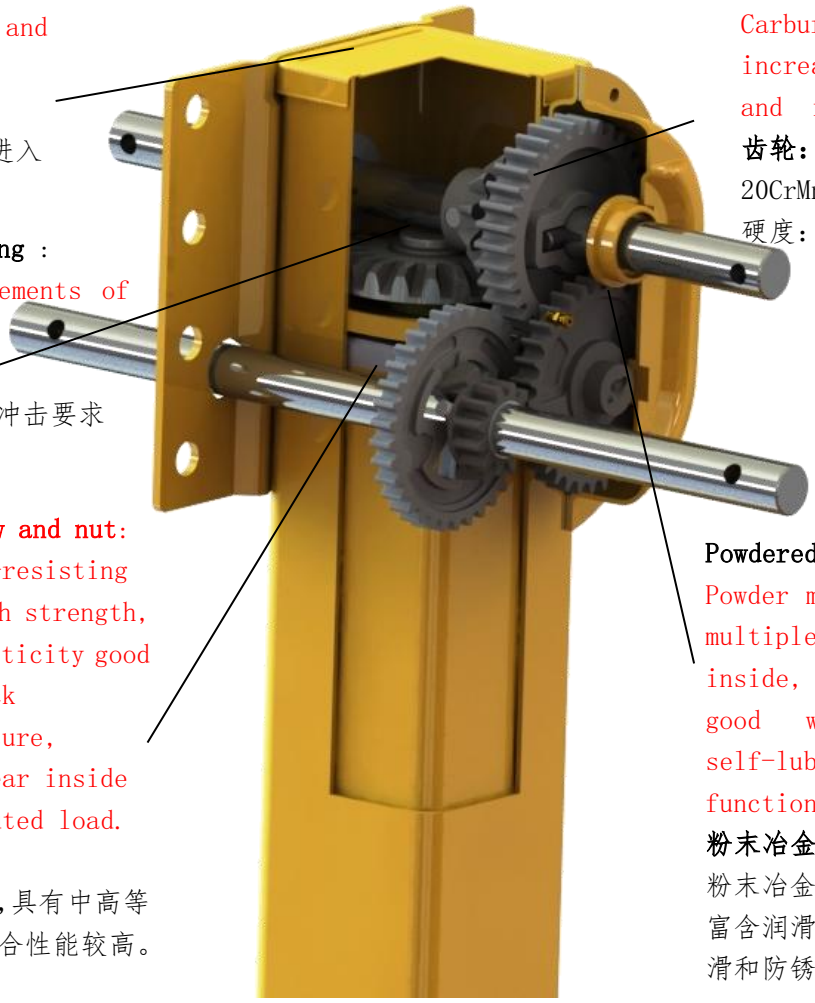

Gears:

20CrMnTi gear

Hardness:57-60ARC

Carburizing treatment to increase wear resistance and impact toughness

齿轮：

20CrMnTi 材质，

硬度：57-60ARC 渗碳处理

Powdered metal shaft bushing:

Powder metallurgy products have multiple interconnected pores inside, rich in lubricating oil, good wear resistance, and self-lubricating and anti rust functions.

粉末冶金套：

粉末冶金制品内部多连通孔隙，产品富含润滑油，耐磨性良好，具有自润滑和防锈功能

